



# Yamhill County Public Works Department

2060 Lafayette Avenue, McMinnville, Oregon 97128

Phone 503.434.7515 | Fax 503.472.4068 | Email [pubwork@co.yamhill.or.us](mailto:pubwork@co.yamhill.or.us) TTY 1.800.735.2900

## YAMHILL COUNTY BOARD OF COMMISSIONERS COVERSHEET

**DATE:** December 16, 2021  
**TO:** Board of Commissioners  
**FROM:** Mark Lago, Public Works Director  
**RE:** Intent to Award for Guard Rail Improvements on Hendricks Road

### **BACKGROUND:**

This is a request for approval for Intent to Award the "Hendricks Road Guardrail Improvement Project". This project scope includes replacing the existing guard rail. This project is on the Capital Improvement Project (CIP) list that was approved by the Board of Commissioners on February 4, 2021 (B.O. 21-54).

3 quotes were solicited from Dirt & Aggregate Interchange Inc., Coral Construction Company, and Columbia River Contractors Inc. The low bidder was Columbia River Contractors Inc. at an quoted cost of \$32,582.75. The budgeted amount during CIP project planning was \$45,000.

This bid amount is below the Public Works Engineering Estimate and is well below the approved 21-22 budget amounts.

### **STAFF RECOMMENDATION:**

Staff is requesting the Board provide Intent for Award for the Hendricks Road Guard Rail Project in the amount of \$32,582.75.

### **FISCAL IMPACT:**

Funds will come out of the Road Fund - Capital Outlay (This project is in the proposed FY 2021-22 budget).

### **ATTACHMENTS:**

1. Columbia River Contractors Inc. quote
2. Coral Construction Company quote
3. Dirt & Aggregate Interchange Inc. quote
4. Guard Rail plan

Accepted by Yamhill County  
Board of Commissioners on  
12/16/21 by Board Order  
# 21-492





PROPOSAL

<b>PROJECT:</b>	HENDRICKS ROAD BRIDGE CARLTON, OR	<b>BID DATE:</b>	2/25/21
		<b>ESTIMATE NO:</b>	2102590

<b>PREPARED BY:</b>	KRIS KARPSTEIN	<b>REFER</b>	
<b>TERMS:</b>		<b>INQUIRIES TO:</b>	KRIS KARPSTEIN

ITEM	DESCRIPTION	QUANTITY	UNIT	UNIT PRICE	TOTAL
1	MOBILIZATION	1.00	LS	\$ 4,000.00	\$ 4,000.00
2	TRAFFIC CONTROL	1.00	LS	\$ 4,500.00	\$ 4,500.00
3	31" GR TYPE 2A	93.75	LF	\$ 56.00	\$ 5,250.00
4	TYPE 3 GUARDRAIL	25.00	LF	\$ 110.00	\$ 2,750.00
5	TRANSITIONS	3.00	EA	\$ 4,000.00	\$ 12,000.00
6	TL-3 50' NON-FLARED TERMINAL	1.00	EA	\$ 4,000.00	\$ 4,000.00
7	TL-2 25' NON-FLARED TERMINAL	1.00	EA	\$ 3,500.00	\$ 3,500.00
8	TYPE 1 MOD ANCHORS	2.00	EA	\$ 1,100.00	\$ 2,200.00
9	TYPE B END PIECES	1.00	EA	\$ 110.00	\$ 110.00
10	EXTRA FOR 8' POSTS	17.00	EA	\$ 110.00	\$ 1,870.00
<b>TOTAL</b>					<b>\$ 40,180.00</b>

**TERMS AND CONDITIONS:**

- 1 BOND EXCLUDED.
- 2 RETAINAGE NOT TO EXCEED THE PERCENTAGE BEING WITHHELD BY OWNER.
- 3 TRAFFIC CONTROL INCLUDED.
- 4 PROPOSAL ASSUMES MUTUALLY ACCEPTABLE SUBCONTRACT TERMS AND SCHEDULE.
- 5 PROPOSAL INCLUDES ONE MOBILIZATION.
- 6 PROPOSAL EXCLUDES LIABILITY INSURANCE LIMITS IN EXCESS OF \$ 10.0 MM.
- 7 PROPOSAL IS VALID FOR THIRTY (30) CALENDAR DAYS.

---

ABOVE PRICE QUOTED FOR IMMEDIATE ACCEPTANCE UNLESS OTHERWISE STATED; APPLY ONLY TO PROJECT SPECIFIED.

---

**CORAL CONSTRUCTION COMPANY**

**Revised**

BY:	<i>Kris Karpstein</i>
TITLE:	ESTIMATOR
DATE:	12/3/21



DIRT & AGGREGATE  
INTERCHANGE, INC.

# QUOTATION

REVISED

DATE: 12/1/2021

TO: Yamhill County

Attn: ESTIMATOR

FAX: [haffnerg@co.yamhill.com](mailto:haffnerg@co.yamhill.com)

Project Name: **Hendricks Bridge - Guardrail Replacement**  
 Owner: Yamhill County  
 Bid Date & Time:

<u>Item</u>	<u>Description</u>	<u>Qty</u>	<u>U/M</u>	<u>Unit Price</u>	<u>Extended</u>
1	Mobilization	1	EA	\$2,500.00	\$2,500.00
2	Remove Guardrail	1	LS	\$2,250.00	\$2,250.00
3	Guardrail 31" Type 2-A	106.25	LF	\$40.00	\$4,250.00
4	Guardrail 31" Type 3	25	LF	\$75.00	\$1,875.00
5	Guardrail Transitions	3	EA	\$4,650.00	\$13,950.00
6	Guardrail Terminals Non Flared	1	EA	\$3,900.00	\$3,900.00
7	Guardrail Terminals Non Flared TL-2	1	EA	\$3,555.00	\$3,555.00
8	Guardrail Anchor Type 1 Modified	2	EA	\$1,450.00	\$2,900.00
9	Guardrail End Piece Type B	1	EA	\$100.00	\$100.00
10	Traffic Control	1	LS	\$6,620.00	\$6,620.00
				<b>TOTAL:</b>	<b>\$41,900.00</b>

Due to continued and unpredictable increases in material costs and resulting delays in delivery of such materials, the prices and delivery dates quoted herein will automatically expire thirty (30) days from the above date, unless accepted in writing prior to that date.

Thank you for your consideration.

DIRT and AGGREGATE INTERCHANGE, INC.

Signed: William Smith

*We are a Minority Business Enterprise*


OR DBE #493, OR CCB# 26599, WA CCB# DIRTAL192NP, WA DBE# D4 M0700 781  
 20905 NE Sandy Blvd, Fairview, OR 97024 Phone: 503-661-5093 Fax: 503-669-1192



# Hendricks Bridge Guardrail Dimensions, Carlton

1"=50'; All units in ft

12/06/21

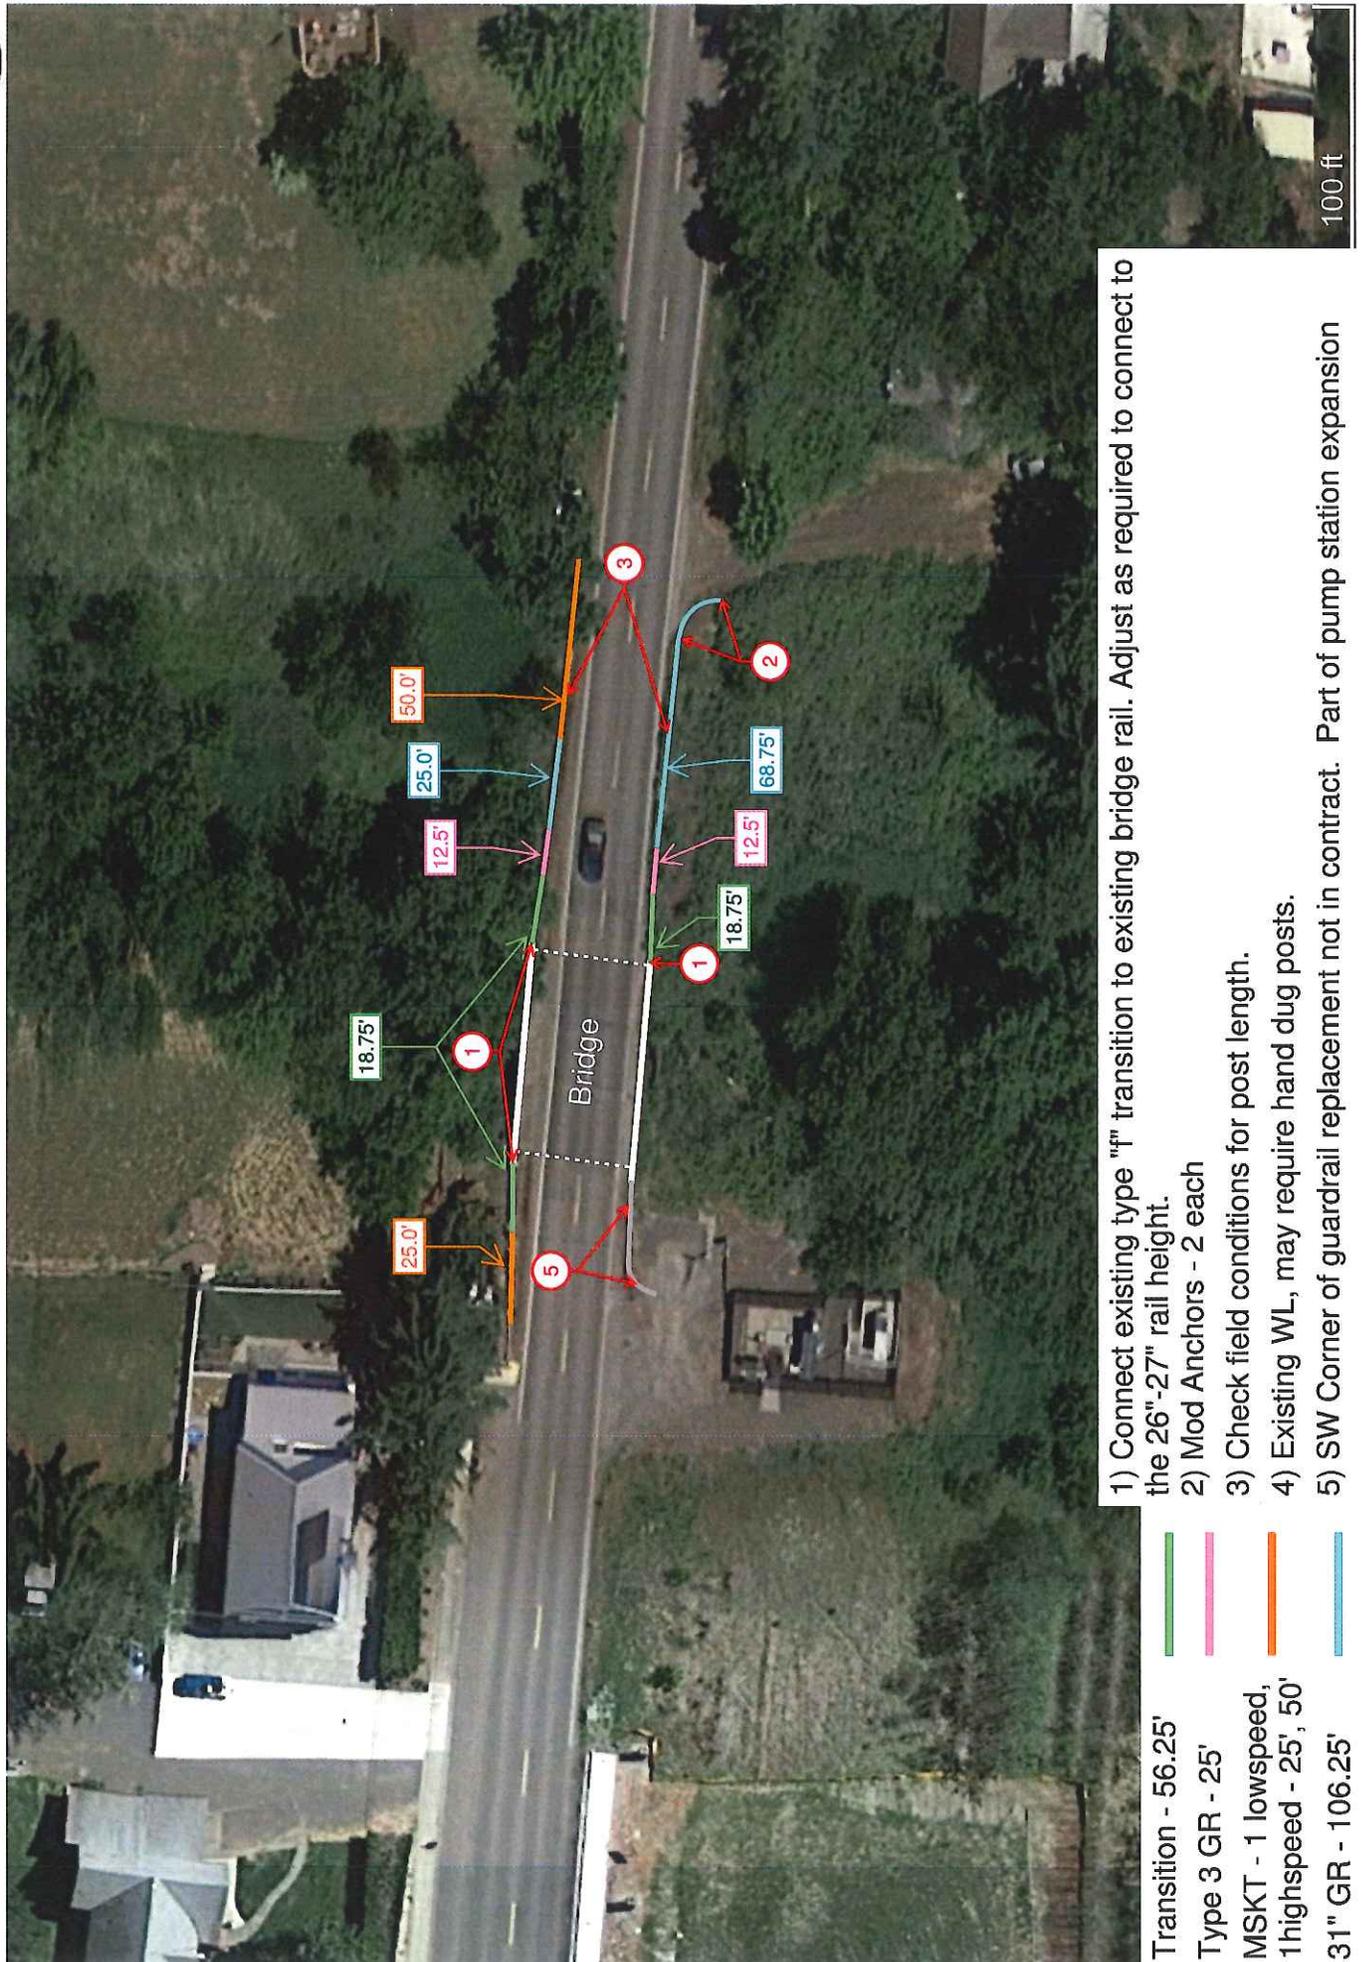

- Transition - 56.25'
- Type 3 GR - 25'
- MSKT - 1 lowspeed, 1 highspeed - 25', 50'
- 31" GR - 106.25'

- 1) Connect existing type "f" transition to existing bridge rail. Adjust as required to connect to the 26"-27" rail height.
- 2) Mod Anchors - 2 each
- 3) Check field conditions for post length.
- 4) Existing WL, may require hand dug posts.
- 5) SW Corner of guardrail replacement not in contract. Part of pump station expansion